# Grinding Wheels

## 1/4" - Depressed Center Wheels

### *A24T - Edge Grinding*

- Aluminum oxide grain
- Hard bond designed for edge and bevel grinding and other applications where a harder wheel is preferred
- Longer life for fewer wheel changes

M Ferrous Metals (iron, steel, welds, etc.)

S Low grade stainless steel

| Dia. | Size Width | Bore | Max RPM | Grades Available Part Number A24T | Qty Per Box | Qty Per Ctn | Lbs Per Box |
|---|---|---|---|---|---|---|---|
| 4-1/2 | 1/4 | 7/8 | 13,300 | 20145 | 25 | 100 | 9 |
| 4-1/2 | 1/4 | 5/8-11 | 13,300 | 20245 | 10 | 40 | 5 |
| 5 | 1/4 | 7/8 | 12,200 | 20155 | 25 | 100 | 11 |
| 5 | 1/4 | 5/8-11 | 12,200 | 20255 | 10 | 40 | 8 |
| 7 | 1/4 | 7/8 | 8,500 | 20175 | 15 | 60 | 13 |
| 7 | 1/4 | 5/8-11 | 8,500 | 20275 | 32 | 40 | 5 |
| 9 | 1/4 | 7/8 | 6,600 | 20195 | 20 | 40 | 20 |
| 9 | 1/4 | 5/8-11 | 6,600 | 20295 | 10 | 10 | 20 |

# Grinding Wheels

## NEW 1/8" - Pipeline Wheels

### *A36T - Cutting/Light Grinding*

- Designed to perform both cutting and light grinding

M Ferrous Metals (iron, steel, welds, etc.)

S Low grade stainless steel

## TECH-DESIGN

***Pipeline .125 thickness well-suited for root passes and edge work.***

***Pipeline 5/32 thickness designed more for light-grinding when a heavy-duty wheel is the right choice.***

**NEW**

| Dia. | Size Width | Bore | Max RPM | Grades Available Part Number Pipeline - A36T | Qty Per Box | Qty Per Ctn | Lbs Per Box |
|---|---|---|---|---|---|---|---|
| 4-1/2 | 1/8 (.125) | 7/8 | 13,300 | 20345 | 50 | 400 | 8 |
| 4-1/2 | 1/8 (.125) | 5/8-11 | 13,300 | 20445 | 10 | 40 | 4 |
| 4-1/2 | 1/8 (5/32) | 7/8 | 13,300 | 21345 | 50 | 400 | 8 |
| 4-1/2 | 1/8 (5/32) | 5/8-11 | 13,300 | 21445 | 10 | 40 | 4 |
| 5 | 1/8 (.125) | 7/8 | 12,200 | 20355 | 40 | 240 | 8 |
| 5 | 1/8 (.125) | 5/8-11 | 12,200 | 20455 | 10 | 40 | 5 |
| 7 | 1/8 (.125) | 7/8 | 8,500 | 20375 | 30 | 120 | 12 |
| 7 | 1/8 (.125) | 5/8-11 | 8,500 | 20475 | 10 | 40 | 5 |
| 7 | 1/8 (5/32) | 7/8 | 8,500 | 21375 | 30 | 120 | 12 |
| 7 | 1/8 (5/32) | 5/8-11 | 8,500 | 21475 | 10 | 40 | 5 |

# Stainless Grinding

## S-TERMINATOR™

### *36T - Ultra Stainless Grinding*

- High performance specialty grain
- 50% faster grinding than standard aluminum oxide
- No discoloring of stainless steel
- Less operator fatigue

S Stainless steel, Inconel, Titanium

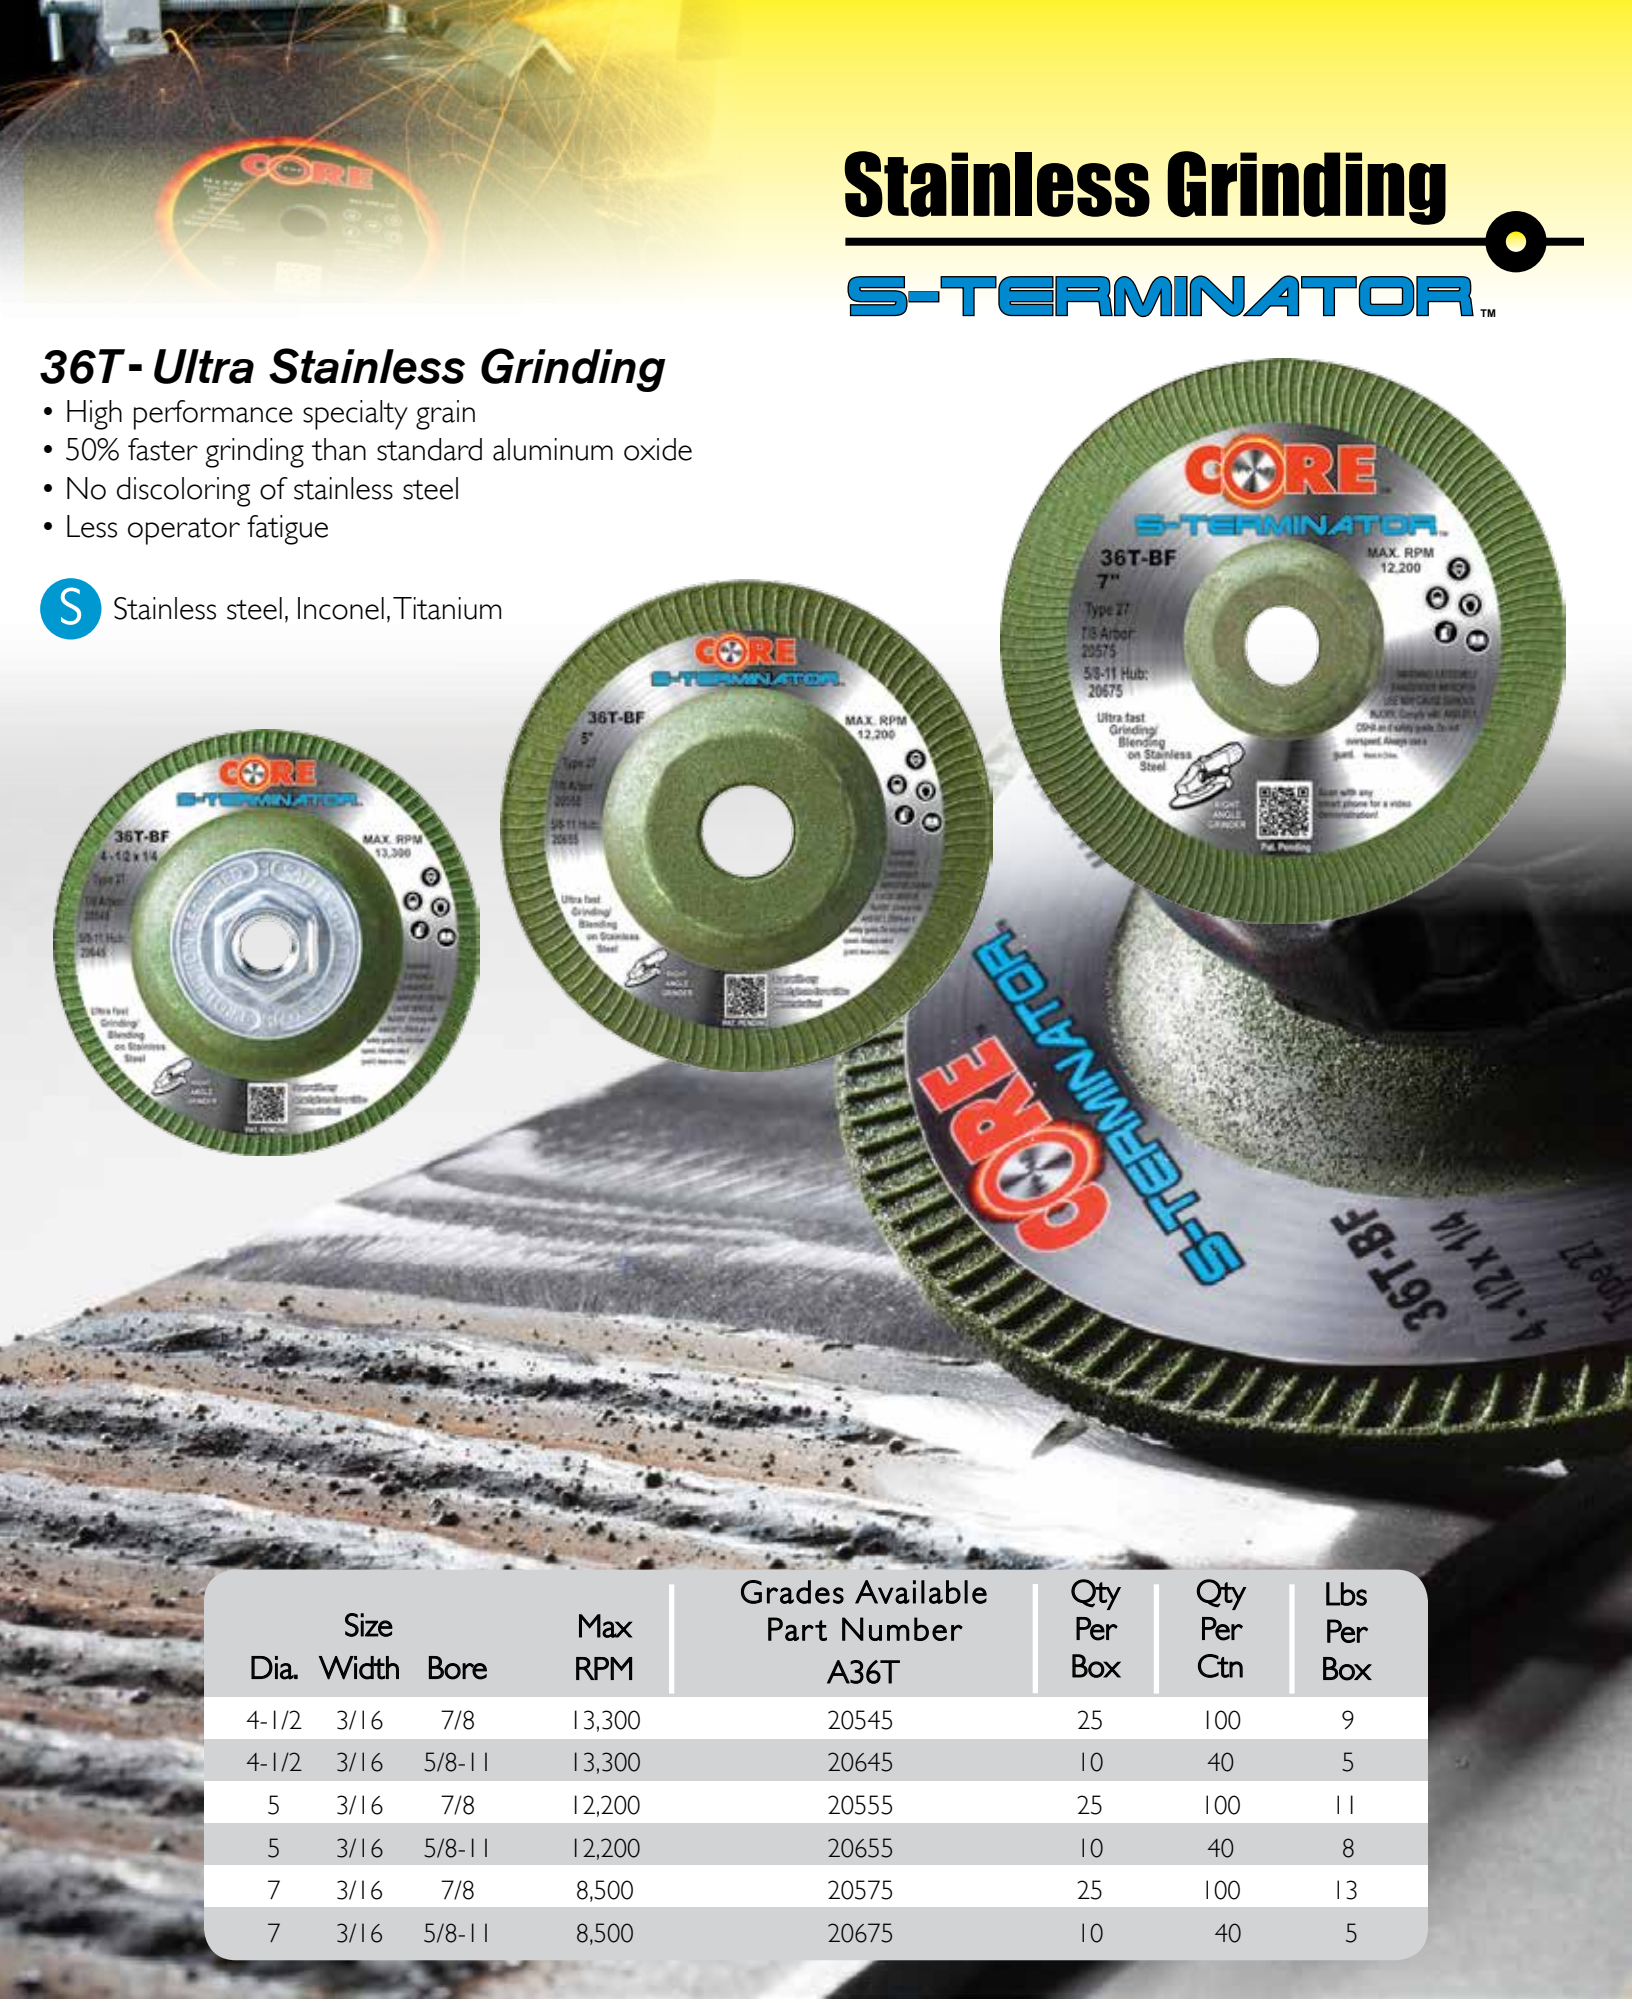


| Dia. | Size Width | Bore | Max RPM | Grades Available Part Number A36T | Qty Per Box | Qty Per Ctn | Lbs Per Box |
|---|---|---|---|---|---|---|---|
| 4-1/2 | 3/16 | 7/8 | 13,300 | 20545 | 25 | 100 | 9 |
| 4-1/2 | 3/16 | 5/8-11 | 13,300 | 20645 | 10 | 40 | 5 |
| 5 | 3/16 | 7/8 | 12,200 | 20555 | 25 | 100 | 11 |
| 5 | 3/16 | 5/8-11 | 12,200 | 20655 | 10 | 40 | 8 |
| 7 | 3/16 | 7/8 | 8,500 | 20575 | 25 | 100 | 13 |
| 7 | 3/16 | 5/8-11 | 8,500 | 20675 | 10 | 40 | 5 |